


Oscillator

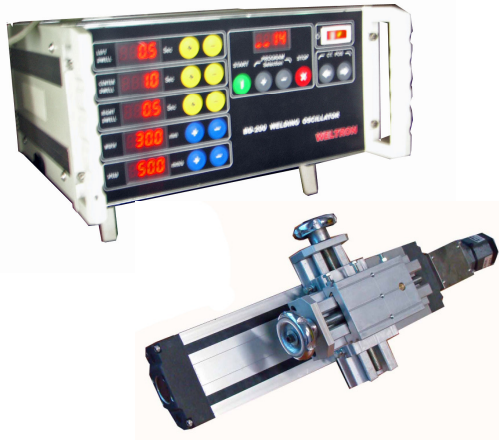

Standard package

- precision slide
- Control Box
- Remote hand pendant w/3m cable.
- Cross fine adjusted slide (option)

Model : BD-200 Welding Oscillator
are special design for use on
MAG/TIG /PTA, welding. All function
are digital display and can be change
the value on the fly. Its can be
storage up to 16 nos. of preset
program.

Specification :

Travel stroke	: 0 ~ 120mm
Load	: 10 Kgs
Dwell Position	: 3 position
Middle Position Moving Range	: 0-120mm
Left Amplitude Range	: 0-60mm
Right Amplitude Range	: 0-60mm
Left Dwell time	: 0.1 ~ 5 sec
Middle Dwell Time	: 0.1 ~ 5 sec
Right Dwell Time	: 0.1 ~ 5 sec
Oscillation speed	: 1.0 ~ 50mm/sec
Remote control Pendant	: w/ 3m cable
Slide Motor	: 2 phase stepper motor
Input supply	: AC 230V,1 phase, 50Hz

Note: Due to the continuous improvements of our products, the design and specifications are subjected to change

